Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Vibia

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 027547/1B

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Renobable PCB		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

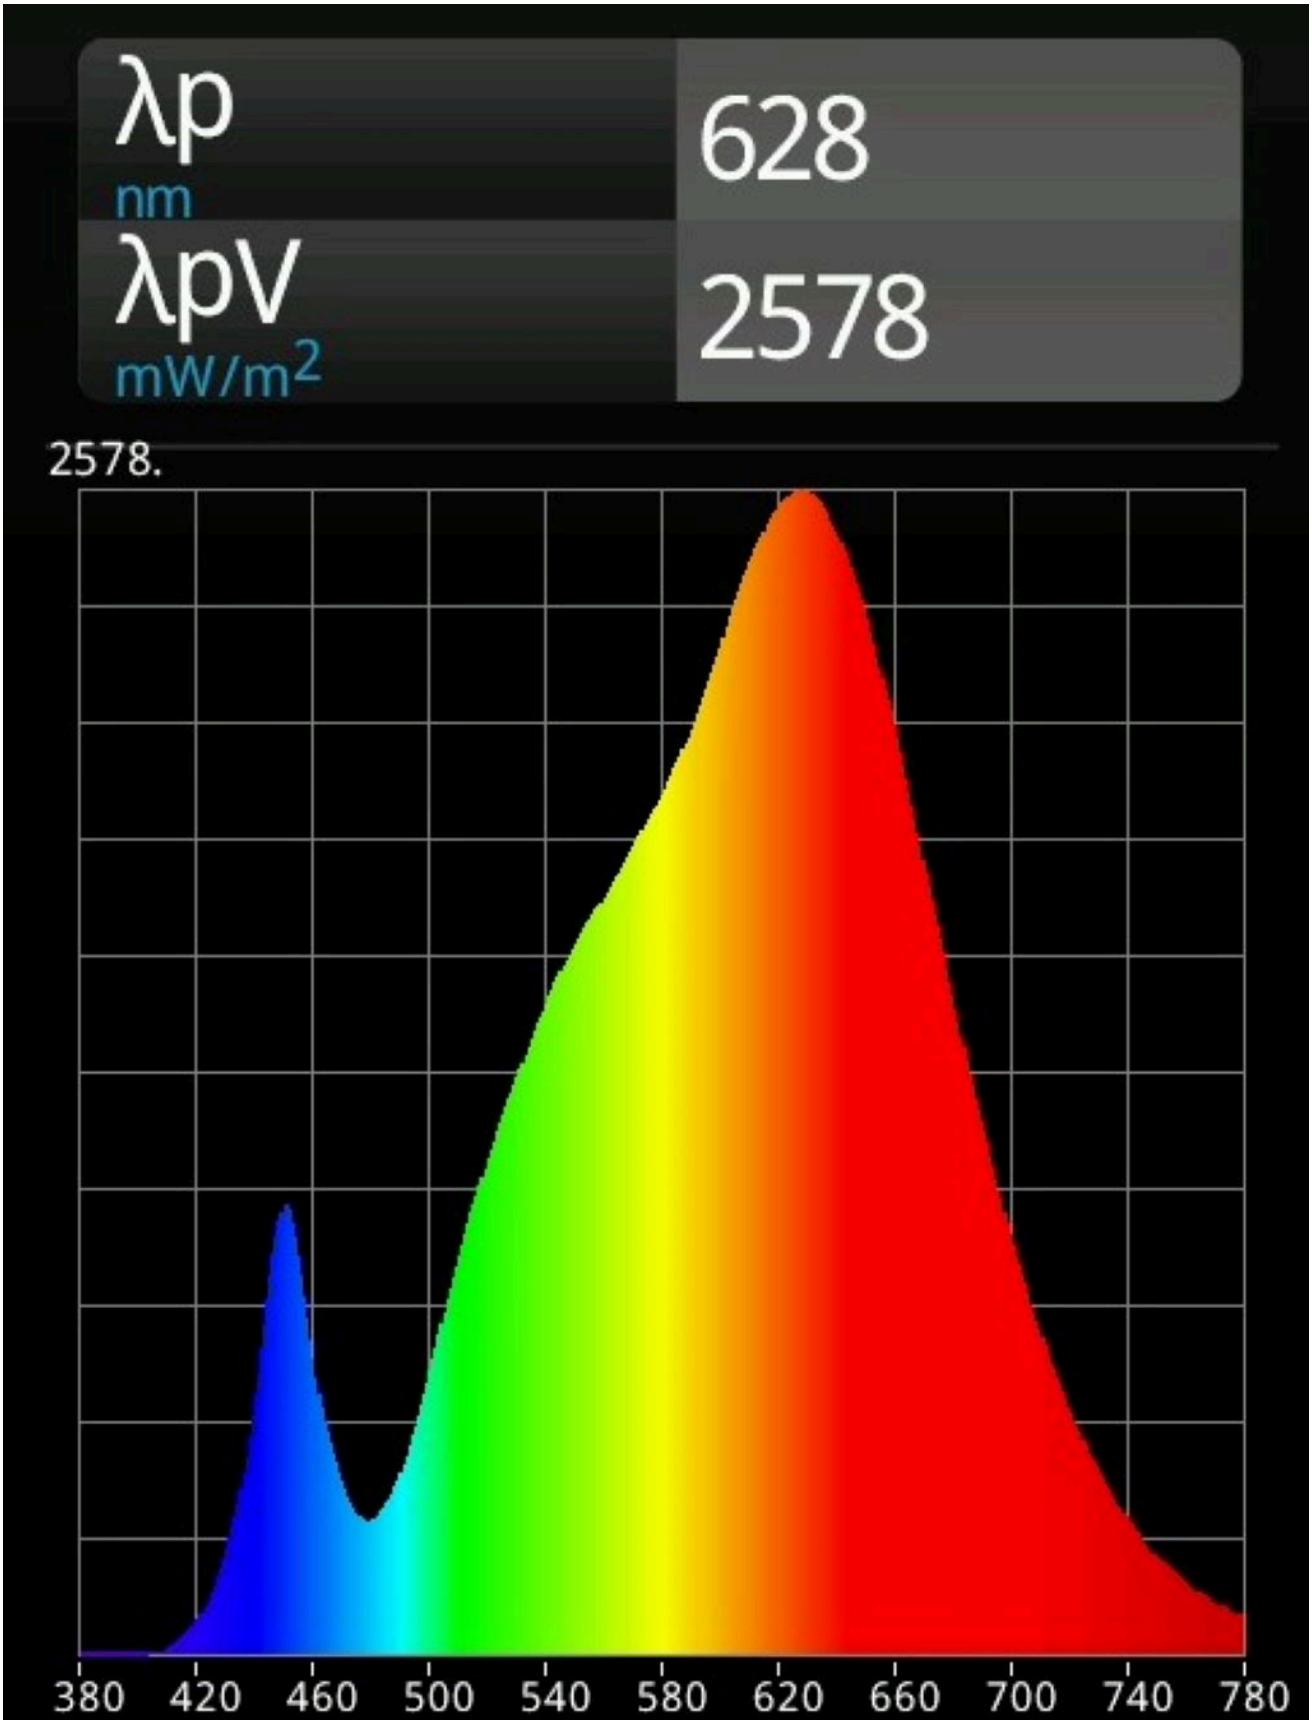
Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	1 019 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	14,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control — Height	600	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	200		
Outer dimensions without separate control gear, lighting control — Depth	2 000		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,458 0,411
Parameters for LED and OLED light sources:				
R9 colour rendering index value		61	Survival factor	-
the lumen maintenance factor		-		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;


λp
nm
628
λpV
mW/m2
2578
2578.
380
420
460
500
540
580
620
660
700
740
780

Model placed on the Union market from 01/01/2010

EPREL registration number: 915327 https://eprel.ec.europa.eu/qr/915327

Supplier: VIBIA LIGHTING, SLU (Manufacturer) **Website:** www.vibia.com

Customer care service:

Name: Vibia Lighting **Website:** www.vibia.com

Email: vibia@vibialighting.com **Phone:** +34 934 796 970

Address:
progres 4-6
08850 gava
Spain